

08/30/99  
JCS649 U.S. PTO  
09/385739  
08/30/99

ASSISTANT COMMISSIONER FOR PATENTS  
Washington, D. C. 20231

PATENT APPLICATION

Case Docket No. 198-0046

Date: August 24, 1999

A

Transmitted herewith for filing is the patent application of Inventor(s):

William Weber  
Michael Walraven  
Jared Clark  
Daniel Bach

For: **METHOD OF PARAMETRIC DESIGN OF AN INSTRUMENT PANEL SUPPORT STRUCTURE**

Enclosed are:

- ☒ 12 sheet(s) of drawings  
☒ Assignment and Cover Sheet  
☒ Information Disclosure Statement, PTO Form 1449, and Copies of Citations  
☐ A certified copy of

The filing fee has been calculated as shown below for OTHER THAN A SMALL ENTITY:

FOR	NO. FILED	NO. EXTRA	RATE	FEE
Basic Fee				\$ 760
Total Claims	18	0	18	\$ 0
Indep Claims	3	0	78	\$ 0
Multiple Dependent Claims(s) Presented	0		260	\$ 0
		TOTAL		\$ 760

- ☒ Please charge Deposit Account No. 06-1510 in the amount shown next to the Total.  
A duplicate copy of this sheet is enclosed.  
☒ The Commissioner is hereby authorized to charge payment of the following fees associated with this communication or credit any overpayment to Deposit Account No. 06-1510. If there are insufficient funds in this account, please charge the fees to Deposit Account No. 06-1500. A duplicate copy of this sheet is enclosed.

Any additional filing fees required under 37 CFR 1.16.

Any patent application processing fees under 37 CFR 1.17.

- ☒ The Commissioner is hereby authorized to charge payment of the following fees during the pendency of this application or credit any overpayment to Deposit Account No. 06-1510. If there are insufficient funds in this account, please charge the fees to Deposit Account No. 06-1500.

Any patent application processing fees under 37 CFR 1.17.

Any filing fees under 37 CFR 1.16 for presentation of extra claims.

"Express Mail"

Mailing Label Number

EL41523442245

Date of Deposit August 30, 1999

I hereby certify that this paper or fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to the Commissioner of Patent and Trademarks, Washington, D.C. 20231

Carol S. Freitas  
(Printed Name of Person Mailing Paper or Fee)

Carol S. Freitas  
(Signature of Person Mailing Paper or Fee)

David B. Kelley  
David B. Kelley  
Attorney or Agent of Record  
Registration No. 33,718  
Ford Global Technologies, Inc.  
One Parklane Blvd.,  
600 Parklane Towers East  
Dearborn, MI 48126

Attorney Docket No: 198-0046

Please call 313-322-7762 if this paper becomes separated from the file.

JCS649 U.S. PTO  
09/385739  
08/30/99

5                    METHOD OF PARAMETRIC DESIGN  
                     OF AN  
                     INSTRUMENT PANEL SUPPORT STRUCTURE

10                   BACKGROUND OF THE INVENTION

1.            Field of the Invention

                 The present invention relates generally to  
15 computer-aided design of vehicles and, more  
specifically, to a method of parametric design of an  
instrument panel support structure for an instrument  
panel on a vehicle.

20 2.            Description of the Related Art

                 Vehicle design, and in particular  
automotive vehicle design, has advanced to a state in  
which computer-aided design techniques are frequently  
incorporated in the development of a new vehicle.  
25 Computer-aided design is especially beneficial in  
packaging the various systems incorporated within a  
vehicle, to maximize design and functional  
capabilities of the vehicle systems. One example of  
a vehicle system is the instrument panel support  
30 structure for an instrument panel. The instrument  
panel support structure is positioned between a side  
structure of the vehicle and provides structural

09366730 003009

reinforcement for a vehicle body. The instrument panel support structure also provides an attachment surface for various vehicle components such as an instrument panel, an inflatable restraint system, or  
5 a heating, ventilation and air conditioning HVAC system.

One aspect of the packaging task for a vehicle system, such as the instrument panel support structure, is to ensure that it is spatially  
10 compatible with a particular environment, while still complying with predetermined functional criteria, including performance and durability requirements. In the past, various methods have been utilized to determine whether a proposed design meets such  
15 predetermined criteria. For example, a proposed design may be analyzed in two dimensions, which requires many iterations of a drawing. A three-dimensional model may also be constructed to obtain a better perspective of the design. The three-  
20 dimensional model may further be subjected to testing to determine whether it complies with performance and durability criteria. This method is time consuming and expensive.

It is also known that design methods that  
25 are knowledge-based are being utilized to design a vehicle system. The knowledge-based design method

09385739-003099

provides advice to the user of the method based on the environment of the design application used. Advantageously, knowledge-based design techniques maximize the amount of knowledge utilized, while  
5 developing a new vehicle system in a minimal period of time. An example of a knowledge-based design technique is disclosed in U.S. Patent No. 5,799,293 to Kaepf, entitled "Method For Optimizing The Design Of A Product Using Knowledge Based Engineering  
10 Techniques", the disclosure of which is hereby incorporated by reference.

It is also known to use a computer-aided design technique to design a vehicle system. An example of a computer aided design technique is  
15 disclosed in U.S. Patent Application, SN \_\_\_\_\_, entitled "Method and System For Vehicle Design Using Occupant Reach Zones", the disclosure of which is also hereby incorporated by reference.

While the above design techniques work  
20 well, they do not take into account the particular functional and packaging criteria associated with designing an instrument panel support structure. Therefore, there is a need in the art to provide a method for designing an instrument panel support  
25 structure for an instrument panel on a vehicle using

09385739.003009

a parametric design technique that accommodates functional and packaging criteria.

5

#### SUMMARY OF THE INVENTION

Accordingly, the present invention is a method of parametric design of an instrument panel support structure for an instrument panel on a vehicle. The method includes the step of determining an input parameter, such that the input parameter is a three dimensional coordinate defining the instrument panel support structure relative to the vehicle. The method also includes the step of generating a design of the instrument panel support structure using the input parameter and determining if the design of the instrument panel support structure meets a predetermined criteria. The method further includes the step of modifying the input parameter if the design of the instrument panel support structure does not meet the predetermined criteria.

One advantage of the present invention is that an improved method of designing an instrument panel support structure for an instrument panel on a vehicle is provided that uses a parametric design technique to considerably reduce design time and

related expenses. Another advantage of the present invention is that a method of parametric design of an instrument panel support structure is provided that considers packaging criteria. Yet another advantage of the present invention is that a method of designing a instrument panel support structure is provided that allows further analysis of vehicle packaging feasibility early in the design process. Still another advantage of the present invention is that a method of parametric design of an instrument panel support structure is provided which supports computer-aided engineering analysis (CAE) and rapid prototyping. A further advantage of the present invention is that a method of parametric design of an instrument panel support structure is provided that enhances flexibility in design, while still meeting vehicle timing considerations. Still a further advantage of the present invention is that a method of parametric design of an instrument panel support structure is provided that utilizes parametric automated design in light of predetermined criteria.

Other features and advantages of the present invention will be readily appreciated, as the same becomes better understood after reading the subsequent description taken in conjunction with the accompanying drawings.

09385739.003009

# BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a block diagram of a system which  
5 may be utilized with a method of parametric design of  
an instrument panel support structure for a vehicle,  
according to the present invention.

FIG. 2 is a perspective view of an  
instrument panel support structure for an instrument  
10 panel on a vehicle designed by a method, according to  
the present invention.

FIG. 3 is a perspective view of two  
parametric designs of the instrument panel support  
structure of FIG. 2.

15 FIG. 4 is a plan view of two parametric  
designs of the instrument panel support structure of  
FIG. 3.

FIG. 5A is a perspective view of two  
parametric designs of a driver side portion of the  
20 instrument panel support structure of FIG. 2, using  
an occupant H-point as a reference point.

FIG. 5B is a perspective view of two  
parametric designs of a driver side portion of the  
instrument panel support structure of FIG. 2, without  
25 using the occupant H-point as a reference point.

09385739.083099

FIG. 6B is a side view of the upper  
5 attachment bracket of FIG. 6A.

10                   FIG. 7B is a side view of the upper driver  
side knee bolster attachment bracket.

FIG. 8B is a plan view of the outer driver side knee bolster attachment bracket of FIG. 8A.

FIG. 9B is a perspective view of two parametric designs of the inner passenger side knee attachment support bracket of FIG. 9A.



FIG. 10A is a plan view of a center support bracket for the instrument panel support structure of FIG. 2.

FIG. 10B is a side view of the center support bracket of FIG. 10A.

FIG. 10C is a perspective view of two parametric designs of the instrument panel support structure of FIG. 10A, using a diameter of a cross car support beam as a reference point.

FIG. 11 is a block diagram of a method of parametric design of an instrument panel support structure for an instrument panel on a vehicle, according to the present invention, for the instrument panel support structure of FIG. 2.

FIG. 12 is a flowchart of a method of parametric design of an instrument panel support structure for an instrument panel on a vehicle, according to the present invention, for the instrument panel support structure of FIG. 2.

FIGS. 13 and 14 are flowcharts of another embodiment of a method of parametric design of an instrument panel support structure for an instrument panel on a vehicle, according to the present invention, for the instrument panel support structure of FIG. 2.

FIG. 15 is a view of a system for parametric design of the instrument panel support structure on a vehicle, according to the present invention.

5

**DESCRIPTION OF THE PREFERRED EMBODIMENT(S)**

Vehicle design, and in particular the design of an instrument panel support structure on a vehicle, is achieved according to the present  
10 invention with a generic parametric driven design process. Advantageously, this process allows flexibility in vehicle design and engineering analysis of the design in a fraction of the time required using conventional design methods. Various  
15 computer based tools are integrated to achieve this enormous time and expense savings, including solid modeling, parametric design, automated studies and a non-parametric components library, also referred to as a standard parts library.

20 Referring to the drawings and in particular FIG. 1, the tools 10 used by a method 18 for designing a instrument panel support structure, according to the present invention, are illustrated graphically. The tools 10 include a component parts  
25 library 12 stored on an electronic storage device (not shown). The component parts library 12 is a

09365739-103009

database providing an electronic representation of various types of component parts that may be supported by an instrument panel support structure, in a manner to be described. The component parts library 12 also includes information in electronic form regarding various types of instrument panel support structure architectures, to be described, that are available. Packaging studies incorporating these component parts on the instrument panel support structure can be done to assess many factors relating to the design of the instrument panel support structure.

The tools 10 also include a vehicle platform library 14 stored on the electronic storage device. The vehicle platform library 14 is an electrical representation of a vehicle platform or a portion thereof. For example, the vehicle platform library 14 may include information regarding a particular vehicle body design, to be described. It should be appreciated that the vehicle platform library 14 and component parts library 12 may be stored on the same electronic storage device.

The tools 10 may also include various design tools, generally indicated at 16, which can be used for the method 18, in a manner to be described. These design tools 16 may include solid modeling and

00385733-003099

5

10

25

The tools 10 further include a computer system 22 as is known in the art to implement the

method 18. The computer system 22 includes a processor and a memory 24a, which can provide a display and animation of a system, such as the instrument panel support structure, on a display such as a video terminal 24b. Parametric selection and control for the design can be achieved by a user 26, via a user interactive device 24c, such as a keyboard or a mouse. The user 26 inputs a set of parameters and set of instructions into the computer 24a when prompted to do so. The set of parameters and the set of instructions may be product specific, wherein other data and instructions non-specific to the product may already be stored in the computer 24a.

One example of an input method is a pop-up window with all current parameters, including an on-line description for the parameter and a current value therefore. For example, parametric values may be chosen from a table within a two-dimensional mode, since some vehicle designers prefer to view an assembly in sections which can be laid out on a drawing.

Once the computer system 22 receives the set of parameters and instructions from the user 26, and any information regarding related vehicle systems and information from the libraries 12, 14, the computer system 22 utilizes the method 18, discussed

in detail subsequently, to determine whether requirements have been met.

Advantageously, the computer implemented method of parametric design of an instrument panel support structure combines all of the foregoing to provide an efficient, flexible, and rapid design 28. Further, an instrument panel support structure design is an output of the method 18, and the design is available for further analysis and study.

10 Referring to FIGS. 2 through 10, an instrument panel support structure 100, according to the present invention, is illustrated for an instrument panel (not shown) on a vehicle (not shown), and in particular an automotive vehicle. The 15 vehicle includes a vehicle body (not shown) which serves as a frame for the vehicle, as is known in the art. The vehicle body includes two side structures, (not shown) which are referred to in the art as A-pillars. The vehicle body also includes a front 20 structure (not shown), known as the dash panel, that forms a generally planar surface extending between the side structures. It should be appreciated that the vehicle front structures and side structure define an interior space of the vehicle referred to 25 as the occupant compartment. The vehicle body includes a generally planar member, (not shown)

positioned between the side structures and extending from an upper edge of the dash panel into the occupant compartment, referred to in the art as a cowl. The instrument panel support structure 100 is  
5 positioned between the side structures and rearward of the cowl, and attached to the vehicle in a manner to be described. Advantageously, the instrument panel support structure 100 provides an attachment surface for components typically disposed within the  
10 instrument panel, as is known in the art.

The instrument panel support structure 100 includes a longitudinally extending beam 102, referred to in the art as a cross-car support beam. The beam 102 provides rigidity and support to the  
15 vehicle body and an attachment surface for various components, in a manner to be described. The beam 102 may be divided into a driver side portion 104 on one end, and a passenger side portion 106 on another end, and a central portion 108 between the passenger  
20 side portion 106 and the driver side portion 104.

Referring to FIGS. 2, 3 and 4, the shape of the beam 102 is parametrically determined in light of various input parameters that associatively link a parameter to a coordinate in space. For example, an  
25 input parameter is a dimensional coordinate for the attachment locations of the beam 102 relative to the

vehicle body. Another input parameter is the axis of the beam 102. Still another input parameter is the relative shape of the vehicle body and related components. As illustrated, a regenerated beam design is illustrated in dot-dash lines. It should be appreciated that the beam 102 may include a bend in the regenerated design to provide dimensional clearance between the beam 102 and another part of the vehicle. As shown in FIG. 5A, the design of the beam 102 parametrically references the occupant H-point. Similarly, in FIG. 5B the design of the beam 102 does not reference the H-point.

The beam 102 includes an end bracket 112 for attaching the beam 102 to part of the vehicle body, such as the cowl in this example. The end bracket 110 is generally planar, and is joined onto an end of the beam 102, using a suitable means such as welding. Preferably, there is a left end bracket 110A located on the end of the driver side portion 104 of the beam 102 and a right end bracket 110B located on the end of the passenger side portion 106 of the beam 102. The left and right end brackets 110A, 110B may each include an aperture 112 for receiving a fastener (not shown), such as a bolt, to secure the beam 102 to the cowl.



In this example, the left or right end brackets 110A, 110B have a general "L" shape. It should be appreciated that the left end bracket 110A may have a different shape than the right end bracket 110B, depending on the design of the beam 102. Advantageously, the shape of the right or left end bracket 110A, 110B is parametrically determined in light of mating associative parts defining the attachment location of the beam 102 relative to the vehicle body.

Referring to the FIGS. 6A and 6B the instrument panel support structure 100 also includes an upper attachment bracket 114, also referred to as a cowl top bracket, for attaching the beam 102 to the cowl. The upper attachment bracket 114 is generally planar and extends radially from the beam 102 a sufficient distance to secure the instrument panel support structure 100 to the cowl. The upper attachment bracket 102 may include a flange 116 extending from a side edge of the upper attachment bracket 114 to provide additional strength to the upper attachment bracket 114.

In this example, the upper attachment bracket 114 has a general "J" shape. Advantageously, the shape of the upper attachment bracket 114 is parametrically determined in light of using an input

parameter such as a coordinate point in 3-dimensional space representing an attachment location of the cowl to the vehicle body structure. Another end of the upper attachment bracket 114 is associatively  
5 referenced to another input parameter such as a centerline for the beam 102. A regenerated design is illustrated in dot-dash lines in FIG. 6A.

An end of the upper attachment bracket 114 is secured to the beam 102 by a suitable means such  
10 as welding. Another end of the upper attachment bracket 114 is secured to the cowl by a suitable means such as a fastener (not shown). The upper attachment bracket 114 includes an aperture 118 for receiving the fastener to secure the upper attachment  
15 bracket 114 to the cowl.

The instrument panel support structure 100 also includes a steering column support bracket 120 for supporting the steering column (not shown), as is known in the art. The steering column support  
20 bracket 120 is a generally planar member extending radially from the beam 102 a sufficient amount in a rearward vehicle direction. In this example, the steering column support bracket 120 has a flange 122 extending along a side edge to provide additional  
25 strength, so that the steering column support bracket 120 has a generally "U"-shape.

0306739-000000

0305730-083009  
The shape of the steering column support bracket 120 may be parametrically determined in light of a mating associated part, such as the design of the beam 102 and a three dimensional coordinate 5 representing a location for the steering column. An edge of the steering column support bracket 120 is attached to the beam 102 by a suitable means, such as welding. The steering column support bracket 120 may include a suitable means such as a fastener 124 to 10 secure the steering column to the instrument panel support structure 100. It should be appreciated that, in this example, there are two steering wheel support brackets 120 positioned parallel each other.

The instrument panel support structure 100 15 also includes a knee bolster 126. The knee bolster absorbs energy of a portion of an occupant's body (not shown), such as a knee, under certain conditions. One example of a condition is the movement of an unrestrained occupant as a result of 20 an impact with another object (not shown). In this example, there are two knee bolsters 126, a driver side knee bolster 128 and a passenger side knee bolster 130.

The driver side knee bolster 128 is a 25 generally planar member that is attached to the driver side portion 104 of the instrument panel

5 from a knee bolster study.

15 provide additional structural strength. The upper driver side knee bolster attachment bracket 132 has a generally J-shape. Advantageously, the shape of the upper driver side knee bolster attachment bracket 132 is parametrically determined in light of mating  
20 associative parts, including the knee bolster 128, and the diameter of the beam, as well as an input from the design tool 16 such as a knee bolster study.

25 to the beam 102 using a suitable means such as  
welding. Another end is secured to the driver side

Referring to FIGS. 8A and 8B an outer driver side knee bolster attachment bracket 136 secures an outer edge of the driver side knee bolster 128 to the vehicle body. The outer driver side knee bolster attachment bracket 136 is generally planar. In this example, the bracket 136 has a generally "Z"-shape. Advantageously, the shape of the outer driver side knee bolster attachment bracket 136 is parametrically referenced to the position and shape of the driver side knee bolster 128 relative to the vehicle body. Preferably, one end of the outer driver side knee bolster attachment bracket 136 is secured to the knee bolster 128 by a suitable means such as welding. Another end of the bracket 136 is also secured to the vehicle body by a suitable means such as a fastener (not shown).

An inner driver side knee bolster attachment bracket 138 secures an inner edge of the driver side knee bolster 128 with a center support bracket 150, to be described. The inner driver side 25 knee bolster attachment bracket 138 is generally planar. In this example, the bracket 138 has a

generally "L"-shape. Advantageously, the shape of the inner driver side knee bolster attachment bracket 138 is parametrically determined in light of its associativity to the position and shape of the driver side knee bolster 128 and a center support bracket 150 to be described. Therefore, the design can change the shape of the inner knee bolster attachment bracket 138 from a generally "L" to a generally "Z" shape. Preferably, one end of the inner driver side knee bolster attachment bracket 138 is secured to the knee bolster by a suitable means such as welding. Another end of the bracket 138 is also secured to the vehicle body by a suitable means such as a fastener (not shown).

The passenger side knee bolster 130 is a generally rectangular member extending from the passenger side portion 106 of the beam 102. In this example, the passenger side knee bolster 130 has a central cavity 140 for receiving a glove box member (not shown), as is known in the art. In this example, the location of the passenger side knee bolster 130 is parametrically driven by an input from the design tool 16, such as a knee bolster study, and associatively referenced to the beam 102.

The passenger side knee bolster 130 is secured to the beam 102 by an upper passenger side

05385739-03099

5

15

20

in this example, there are two upper passenger side knee bolster attachment brackets 142.

5 An outer passenger side knee bolster attachment bracket 146 secures an outer edge of the passenger side knee bolster 130 with the vehicle body. The outer passenger side knee bolster attachment bracket 146 and outer driver side knee bolster attachment bracket 136 may have the same shape. The outer passenger side knee bolster  
10 attachment bracket 146 is generally planar. In this example, the bracket 146 has a generally "Z"-shape. Advantageously, the shape of the outer passenger side knee bolster attachment bracket 146 is parametrically associated with the passenger side knee bolster 130  
15 and the vehicle body. Preferably, one end of the outer passenger side knee bolster attachment bracket 146 is secured to the passenger side knee bolster 130 by a suitable means such as welding. Another end of the bracket 146 is also secured to the vehicle body  
20 by a suitable means such as a fastener.

Referring back to FIGS. 9A and 9B, an inner passenger side knee bolster attachment bracket 148 secures an inner edge of the passenger side knee bolster 130 with the center support bracket 150. The  
25 inner passenger side knee bolster attachment bracket 148 is generally planar. In this example, the



5 bolster attachment bracket 142 previously described. Preferably, one end of the outer passenger side knee bolster attachment bracket 146 is secured to the passenger side knee bolster by a suitable means such as welding. Another end of the bracket 148 is also  
10 secured to the vehicle body by a suitable means such as a fastener (not shown).

15 central portion 108 of the beam 102 and a portion of  
the vehicle body such as a floor (not shown). The  
center support bracket 150 provides a mounting  
surface for a center component (not shown) disposed  
within the instrument panel, such as an audio  
20 component or a heating, ventilation and air  
conditioning HVAC controller, as is known in the art.

25 therein. In this example, a side edge has a flange  
152 extending therealong to enhance the structural

integrity of the center support bracket 150. In this example, the center support bracket 150 is parametrically determined from input parameters such as the diameter of the beam, or the design tool 16  
5 such as a reach study.

An upper end of the center support bracket 150 is secured to the beam 102 by a suitable means such as welding. A lower end of the center support bracket 150 is secured to the vehicle body by a  
10 suitable means such as a fastener (not shown). In this example, there are two center support brackets 150 positioned a predetermined distance apart from each other.

Referring to FIG. 11, a block diagram of  
15 the method 18 of parametric design of an instrument panel support structure 100, according to the present invention, is illustrated graphically. In block 162, a first input parameter to block 168, to be described, represents a three-dimensional coordinate  
20 in space of an attachment location for the upper attachment bracket 114 to the cowl portion of the vehicle body, as shown at 180.

In block 164, a second input parameter to block 168 represents a three-dimensional coordinate  
25 in space defining an axis for the beam 102. In this example, four coordinate positions are used to

00325730-003009

reference the beam 102. For example, a first coordinate references the location of the steering wheel along the axis of the beam 102, as shown at 182. A second coordinate references the location of a centerline through the axis of the beam 102, shown at 184. A third coordinate references the location of the passenger side portion 106 of the axis of the beam 102, as shown at 186. A fourth coordinate represents a horizontal length for each of the portions 104, 106, and 108 of the beam 102, as shown at 188A, 188B and 188C, respectively.

In block 166, a third input parameter to block 168 is from the design tool 16. One example is a parameter derived from a knee bolster study, as is known in the art.

In block 168, the design of the instrument panel support structure 100 is parametrically derived using the inputs from blocks 162, 164, and 166. For example, the shape of the beam 102 is determined in block 170 using the location of the steering wheel 182, the centerline of the beam 184 and the location of the passenger side of the beam 186, and the horizontal locations 188A, 188B and 188C of block 164.

The shape of the beam 102 from block 170, and the attachment location to the cowl 180 from

block 162 influences the shape of the upper attachment bracket 114 in block 175. The shape of the beam 102 from block 170 influences the shape of the left and right end brackets 110A 110B.

5           The input from the knee bolster study 166 influences the shape of the driver side knee bolster 128 and passenger side knee bolster 130 in blocks 172 and 174, respectively. The shape of the beam 102 from block 170, the horizontal driver side length 10 188A from block 164 and the driver side knee bolster 128 location from block 172 determine the shape of the upper driver side knee bolster attachment bracket 132 and outer and inner driver side knee bolster attachment brackets 136, 138 in block 176.

15           The shape of the center support bracket 150 is influenced by the beam 102 from block 170 and the horizontal center length 188B from block 164, in block 178. The shape of the beam 102 from block 170, the horizontal passenger side length 188C from block 20 164 and the passenger side knee bolster location from block 174, influence the shape of the upper passenger side knee bolster attachment bracket 142 and outer and inner passenger side knee bolster attachment brackets 146, 148 in block 179.

25           In block 192, a design of the instrument panel support structure 100 is generated. In diamond

0385730-083009  
60080-0225860

Referring to FIG. 12, a flowchart of the method 18 for parametric design of the instrument panel support structure 100 using a computer-aided parametric design technique, according to the present invention, is illustrated. The methodology begins in bubble 200, when it is called for by the user 26. The methodology advances to block 202 and selects a vehicle platform from a database, such as a vehicle platform library 14. The vehicle platform library 14 contains information in electronic form regarding the vehicle environment, including interior size and vehicle body style and other vehicle systems. In this example, information regarding the vehicle body style is selected. The methodology advances to block 204.

25           In block 204, the methodology orients an  
occupant within an occupant compartment of the



for determining the shape and attachment of beam 102 and other components or brackets that are secured to the beam 102. One example of a coordinate point is an x,y,z coordinate of an attachment location for the upper attachment bracket 114 to the cowl, shown at 180. Another example of a coordinate point is an x,y,z coordinate of the center support bracket 150 attachment location, for attaching the center support bracket 150 to the vehicle body shown at 189. Still another example of a coordinate point is the x,y,z, coordinate of the attachment of the left and right end bracket 110A, 110B to the vehicle body, as shown at 190. Yet another example of a coordinate point is the x,y,z, coordinate of a horizontal reference for a driver side portion of the beam 102 as shown at 188A. Yet still another example of a coordinate is the x,y,z coordinate of a horizontal reference for the central portion 108 of the beam 102 shown at 188B. A further example of a coordinate is an x,y,z coordinate of a horizontal reference for the passenger side portion 106 of the beam 102 shown at 188C.

The methodology advances to block 210 and electronically generates the instrument panel support structure 100 design using the input parameters and packages the instrument support structure 100 in

relation to the vehicle systems previously described. The design is generated using the design tool 16 such as a computer aided engineering design technique as is known in the art. Preferably, the appropriate relationships between the instrument panel support structure 100, vehicle body and other vehicle systems, are automatically determined and based upon the parametrically generated instrument panel support structure 100 design.

10 It should be appreciated that packaging refers to an electronic representation of the dimensions of the system, device or component as it geometrically relates to a three-dimensional reference frame of the vehicle. These vehicle systems may include, but are not limited to the instrument panel, the dash panel, cowl side structure, instrument panel support structure 100 and HVAC assembly. A vehicle system is intended to include any part of the vehicle which will interact with the instrument panel support structure 100, either directly or indirectly.

The methodology advances to block 212 and utilizes the design tool 16 or analysis tool 20 to determine if the instrument panel support structure 25 100 design meets a predetermined criteria. For example, the instrument panel support structure 100

00385739.083099



may be compared to human factors criteria, such as for reach, ergonomics and knee bolster position. The instrument panel support structure 100 may be analyzed using engineering analytical techniques such as finite element analysis, or noise, vibration and handling (NVH) analysis.

The methodology advances to block 214 and varies an input parameter based on the results of the various analysis performed in block 212. For example, the position of the knee bolster 126 may be modified as a result of a knee bolster study.

The methodology advances to block 216 and regenerates the model of the instrument panel support structure 100 to take into account the input parameters modified in block 214. Appropriate relationships between the instrument panel support structure 100, vehicle systems and the vehicle are automatically determined and revised according to the modified input parameters. That is, the method of the present invention will automatically rebuild every other affected dimension so that various design alternatives can be evaluated in a timely manner, as shown in dot-dash lines in FIGS. 2 through 10. The methodology advances to bubble 218 and ends.

Referring to FIGS. 13 and 14, a detailed example of another embodiment of the method,



00000000000000000000

00000000000000000000

00000000000000000000000000000000

00000000000000000000

5 316.

10

15

25



20 to determine if a predetermined human factors interaction criteria is acceptable. An example of a human factors interaction criteria includes the results of the knee bolster study. If the  
5 predetermined human factors interaction criteria is not acceptable, the methodology advances to circle 400 shown in FIG. 14 and continues. If the predetermined human factors interaction criteria is acceptable, the methodology advances to diamond 326.

10 In diamond 326 the methodology uses a design tool 16 or analysis tool 20 to determine if a predetermined beam attachment criteria is acceptable. An example of a beam attachment criteria is an attachment location for securing the end bracket  
15 110A, 110B to the side structure of the vehicle body. If beam attachment criteria is not acceptable, the methodology advances to block 400 shown in FIG. 14 and continues.

If the beam attachment criteria is  
20 acceptable, the methodology advances to diamond 328. In diamond 328, the methodology uses the design tool 16 or analysis tool 20 to determine if a predetermined dimensional clearance between the instrument panel support structure 100 and another  
25 portion of the vehicle is acceptable. For example, it may be desirable that the clearance between the

05385730-03009

beam 102 and cowl be one-quarter inch (0.25"). If the instrument panel support structure clearance is not acceptable, the methodology advances to circle 400 shown in FIG. 14 and continues. If the  
5 instrument panel support structure clearance is acceptable, the methodology advances to diamond 330.

In diamond 330, the methodology uses the design tool 16 or analysis tool 20 to determine if a predetermined performance criteria for the instrument  
10 panel support structure 100 is acceptable. An example of a performance criteria is an estimated cost of the instrument panel support structure 100. Another example is that the weight of the instrument panel support structure 100 cannot exceed a  
15 predetermined amount. Still another example of a performance criteria is the NVH and stiffness characteristic of the instrument panel support structure 100. If the predetermined performance criteria are not met, the methodology advances to  
20 circle 400 shown in FIG. 14 and continues. If the predetermined performance criteria are met, the design of the instrument panel support structure 100 is complete and the methodology advances to bubble 360 and ends.

25 Continuing to circle 400 shown in FIG. 14, the methodology advances to diamond 402. In diamond

00385730-003000

402, the methodology determines if the design of the instrument panel support structure 100 should be changed. If the design should not be changed, the methodology advances to bubble 450. In bubble 450  
5 the methodology returns back to the previous entry location.

If the design does need to be changed, the methodology advances to diamond 404 and determines if an orientation of the occupant in the vehicle should  
10 be retained. As previously described, the occupant orientation refers to the "H-point" of a seated occupant. If the occupant orientation should not be changed, the methodology advances to block 410 and changes the occupant orientation. The methodology  
15 advances to circle 350 shown in FIG. 13 and continues.

Referring back to diamond 404, if the occupant orientation should be retained, the methodology advances to diamond 406. In diamond 406  
20 the methodology determines if the center component positioned within the center support bracket 150 should be changed. If the center component should not be changed, the methodology advances to block 408. In block 408, the methodology changes the  
25 center component. The methodology advances to circle 354 shown in FIG. 13 and continues.

03365739 033099  
660330 6275865



Referring back to diamond 406, if the center component positioned within the center support bracket 150 should be retained, the methodology advances to diamond 412. In diamond 412, the methodology determines if a driver side component should be retained. An example of a driver side component is the steering wheel or the instrument cluster, or an inflatable restraint system. If the driver side components should not be retained, the methodology advances to block 414 and changes the driver side components. The methodology then advances to circle 356 shown in FIG. 13 and continues.

Referring back to diamond 412, if the driver side component should be retained, the methodology advances to diamond 416 and determines if a passenger side component should be retained. An example of a passenger side component is a glove box, or an inflatable restraint system. If the passenger side component should not be retained, the methodology advances to block 418 and changes the passenger side component. The methodology advances to circle 358 shown in FIG. 13 and continues.

Referring back to diamond 416, if the passenger side component should be retained, the methodology advances to diamond 420. In diamond 420,

the methodology determines if the instrument panel support structure attachment locations to the vehicle body should be retained. An example of an attachment location is shown at 190. If the attachment location should not be retained, the methodology advances to block 422 and changes the instrument panel support structure attachment location. The methodology then advances to circle 352 shown in FIG. 13 and continues.

10 Referring back to diamond 420, if the instrument panel support structure attachments should be retained, the methodology advances to diamond 424. In diamond 424, the methodology determines if a clearance between the instrument panel support structure 100 and another part of the vehicle should be retained. One example is a clearance between the beam 102 and the HVAC system. If the clearance should not be retained, the methodology advances to block 426. In block 426, the methodology changes the clearance and advances to block 352 shown in FIG. 13 and continues.

Referring back to diamond 424, if the clearance should be retained, the methodology advances to diamond 428. In diamond 428, the methodology determines if the predetermined instrument panel support structure performance

criteria should be retained. One example of a predetermined criteria is optimal natural frequency. If the performance criteria should be changed, the methodology advances to block 430 and changes the instrument panel support structure performance criteria. The methodology advances to circle 352 shown in FIG. 13 and continues.

Referring back to diamond 428, if the instrument panel support structure 100 performance criteria should be retained, the methodology advances to diamond 432. In diamond 432, the methodology determines if any other component should be retained. If any other component should be retained, the methodology advances to bubble 450 previously described. If any other component should not be retained, the methodology advances to block 434 and changes the other component. The methodology then advances to bubble 450 and continues.

Referring to FIG. 15, a representative system 600 for implementing the method for parametric design of the instrument panel support structure 100, according to the present invention, is illustrated. The system 600 includes a processing unit 602 connected to a user interface which may include a display terminal 604, a keyboard 606, a pointing device, such as a mouse 608, and the like. The

00385739-000000

processing unit preferably includes a central processing unit, a memory, and stored instructions which implement the method for parametric design of the instrument panel support structure 100, according to the present invention. The stored instructions may be stored within the processing unit 602 in the memory, or in any non-volatile storage such as magnetic or optical media, EPROM, EEPROM, or the like. Alternatively, instructions may be loaded from removal magnetic media 610, such as a removal disk, sometimes called a floppy disk, optical media 612, or the like. In a preferred embodiment, the system 600 includes a general purpose computer program to implement the functions illustrated and described with reference to FIGS. 1-14. Of course, a system 600, according to the present invention, could also be embodied with a dedicated device which includes various combinations of hardware and software. The preferred embodiment may also include a printer 614 connected to the processing unit 602, as well as a network connection for accessing a local server, an intranet, and the Internet. Preferably, solid modeling software, parametric design software, surface rendering software, animation software, and the like are used for developing the system 600, according to the present invention.

00385739.00258660

The present invention has been described in an illustrative manner. It is to be understood that the terminology, which has been used, is intended to be in the nature of words of description rather than  
5 of limitation.

Many modifications and variations of the present invention are possible in light of the above teachings. Therefore, within the scope of the appended claims, the present invention may be  
10 practiced other than as specifically described.

03385739-033099

WHAT IS CLAIMED IS:

1. A method of parametric design of an instrument panel support structure for an instrument panel in a vehicle comprising:

5                   determining an input parameter, wherein the  
input parameter is a three dimensional coordinate  
defining the instrument panel support structure  
relative to the vehicle;

```

        generating a design of the instrument panel
10  support structure using the input parameter;

```

determining if the design of the instrument panel support structure meets a predetermined criteria; and

modifying the input parameter if the design  
15 of the instrument panel support structure does not  
meet the predetermined criteria.

2. A method as set forth in claim 1 wherein the input parameter is a three dimensional coordinate for an attachment location of the instrument panel support structure relative to the vehicle.

3. A method as set forth in claim 1  
25 wherein the input parameter is a three dimensional  
coordinate for positioning a cross car support beam

4. A method as set forth in claim 1  
5 wherein the input parameter is a three dimensional  
coordinate for positioning a knee bolster portion of  
the instrument panel support structure relative to  
the vehicle.

15

7. A method of parametric design of an instrument panel support structure for a vehicle comprising:

selecting a vehicle body structure for the vehicle from a library stored in a memory of a computer system;

orienting an occupant within the vehicle  
5 body;

locating a steering column relative to the vehicle body;

determining an input parameter, wherein the input parameter is a three dimensional coordinate  
10 defining the instrument panel support structure relative to the vehicle body;

generating a parametric design of the instrument panel support structure using the orientation of the occupant, the location of the  
15 steering wheel, and the input parameter;

comparing the parametric design of the instrument panel support structure to a predetermined criteria;

varying an input parameter to meet the  
20 predetermined criteria; and

regenerating the parametric design of the instrument panel support structure.

8. A method as set forth in claim 7  
25 wherein said step of selecting an input parameter includes selecting an attachment location for

00335739-00000  
000000-00258560



attaching an upper attachment bracket portion of the instrument panel support structure relative to the vehicle.

5           9. A method as set forth in claim 7 wherein said step of selecting an input parameter includes selecting an attachment location for securing a center support bracket portion of the instrument panel support structure relative to the  
10 vehicle.

          10. A method as set forth in claim 7 wherein said step of selecting an input parameter includes selecting an attachment location for  
15 securing an outer portion of the instrument panel support structure relative to the vehicle.

          11. A method as set forth in claim 7 wherein said step of selecting an input parameter  
20 includes defining a centerline location for a center portion of the instrument panel support structure relative to the vehicle.

          12. A method as set forth in claim 7  
25 wherein said step of selecting an input parameter includes defining a centerline location for a driver

09385739-093099

side portion of the instrument panel support structure relative to the vehicle.

13. A method as set forth in claim 7  
5 wherein said step of selecting an input parameter includes defining a centerline location for a passenger side portion of the instrument panel support structure relative to the vehicle.

10 14. A method as set forth in claim 7 including the step of using a computer-aided engineering analytical technique to determine whether the design of the instrument panel support structure meets a predetermined criteria.

15 15. A method as set forth in claim 7 including the step of using a computer-aided human factors analytical technique to determine whether the design of the instrument panel support structure  
20 meets a predetermined criteria.

16. A method of parametric design of an instrument panel support structure for an instrument panel in a vehicle comprising:

selecting a vehicle body style for the vehicle from a vehicle library stored in a memory of a computer system;

orienting an occupant within the vehicle  
5 body;

orienting a steering column within the vehicle body;

selecting a parameter for locating an instrument panel support structure within the vehicle  
10 body;

selecting a parameter for attaching the instrument panel support structure within the vehicle body;

selecting a predetermined condition for the  
15 instrument panel support structure within the vehicle body;

generating a parametric design of an instrument panel support structure using the locating parameter, the attaching parameter and the  
20 predetermined condition;

packaging an instrument panel component within the parametric design of the instrument panel support structure;

determining if the parametric design of the  
25 instrument panel support structure meets a predetermined criteria;

00305730-003000

determining if the parametric design of the instrument panel support structure should be changed if the predetermined criteria is not met;

determining if a parameter should be  
5 changed if the parametric design of the instrument panel support structure should be changed; and

modifying the parameter if the parameter should be changed.

10 17. A method as set forth in claim 16 including the step of using a computer-aided engineering analytical technique to determine whether the design of the instrument panel support structure meets a predetermined criteria.

15

18. A method as set forth in claim 16 including the step of using a computer-aided human factors analytical technique to determine whether the design of the instrument panel support structure  
20 meets a predetermined criteria.

00385739 003009  
660280 62/58560



10

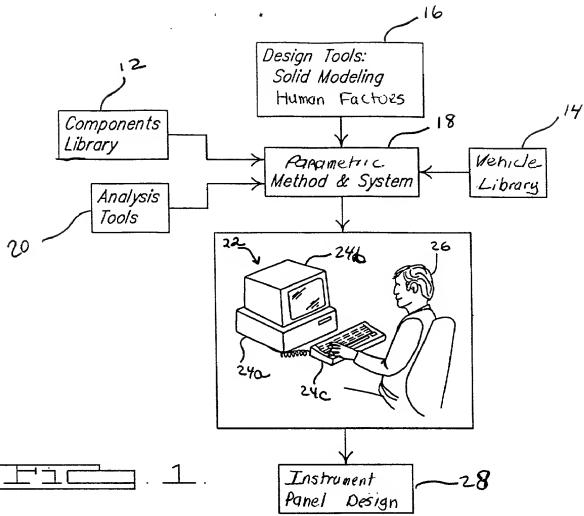

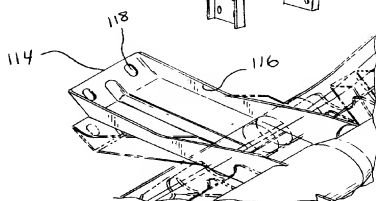
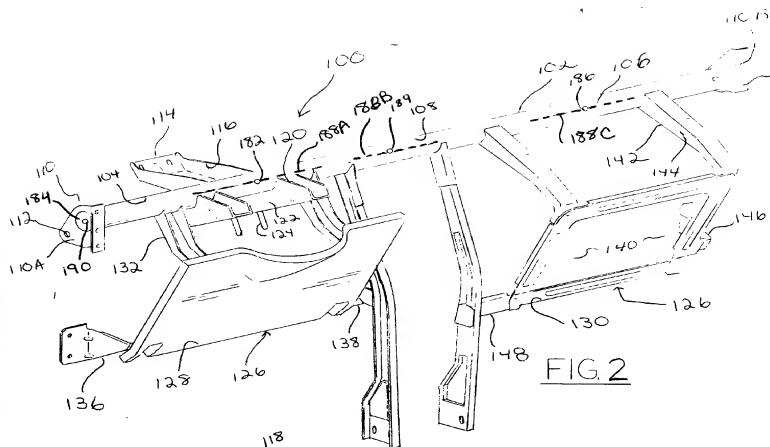


FIG. 1.

09385739-083099







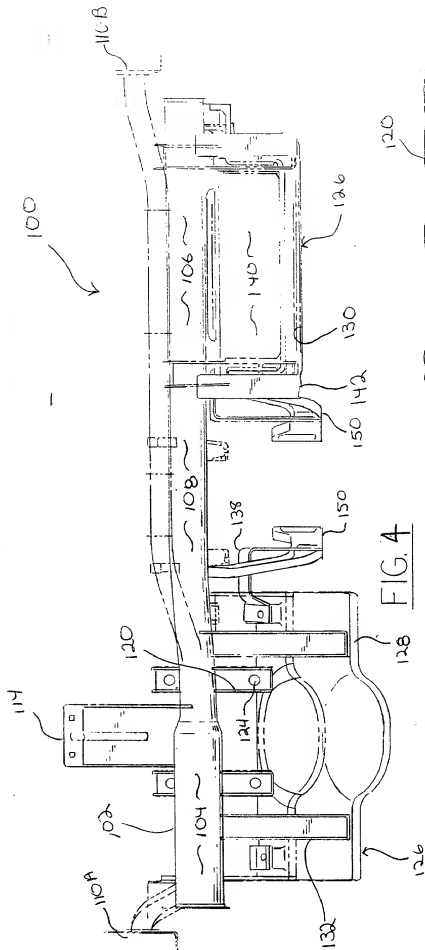


FIG. 4

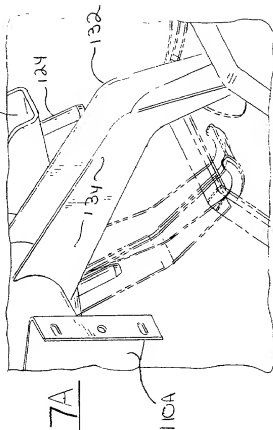


FIG. 7A


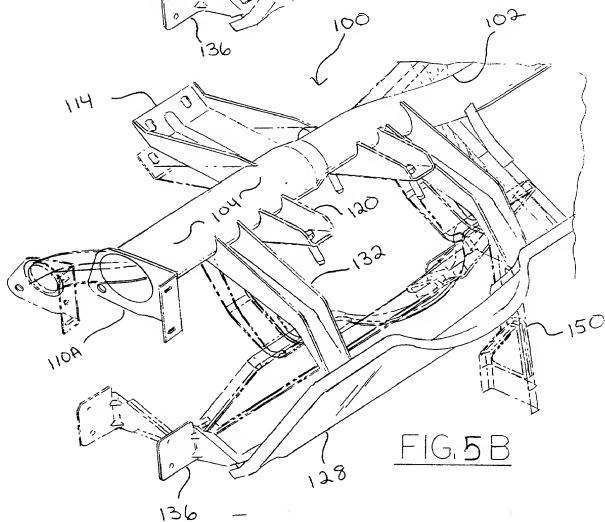
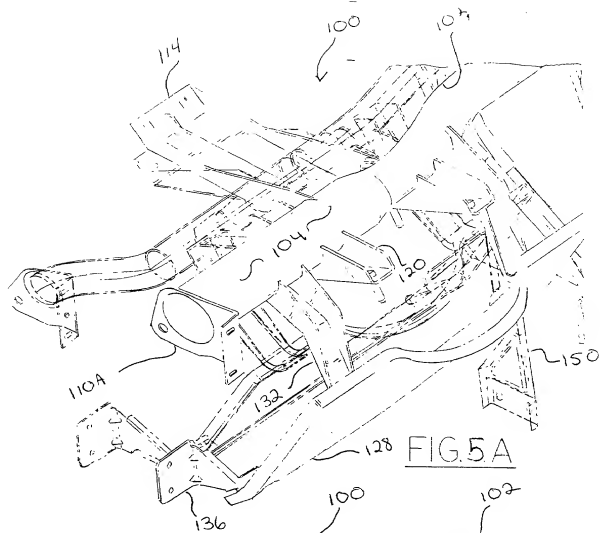


FIG. 7B



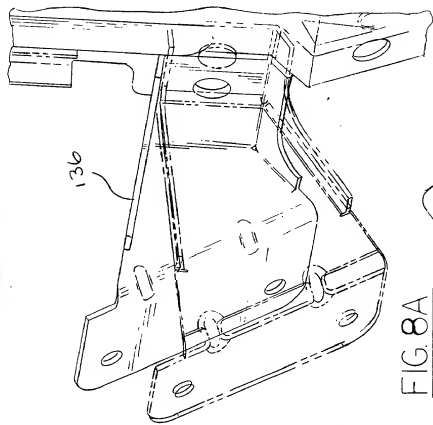


FIG. 8A




FIG. 8B

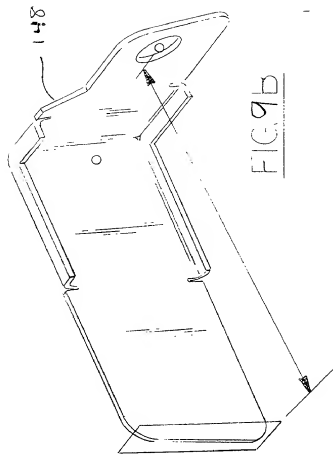


FIG. 9B

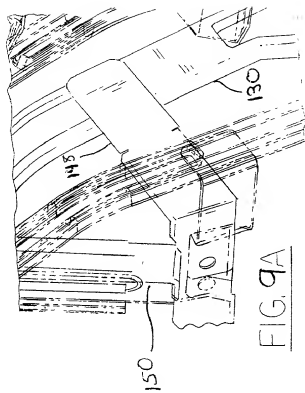


FIG. 9A




FIG. 10B

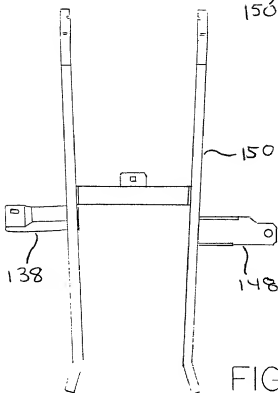


FIG. 10A



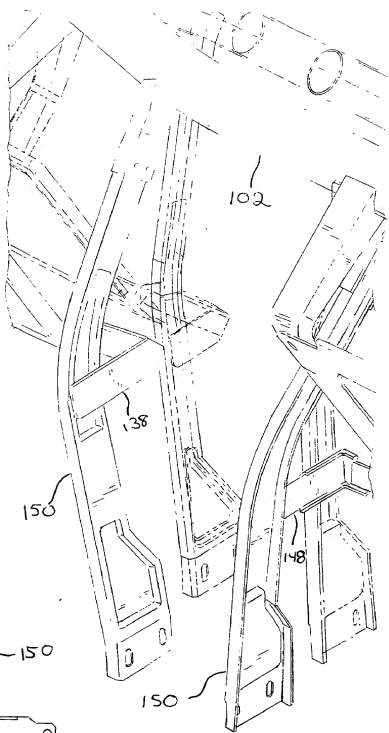


FIG. 10C

160

162

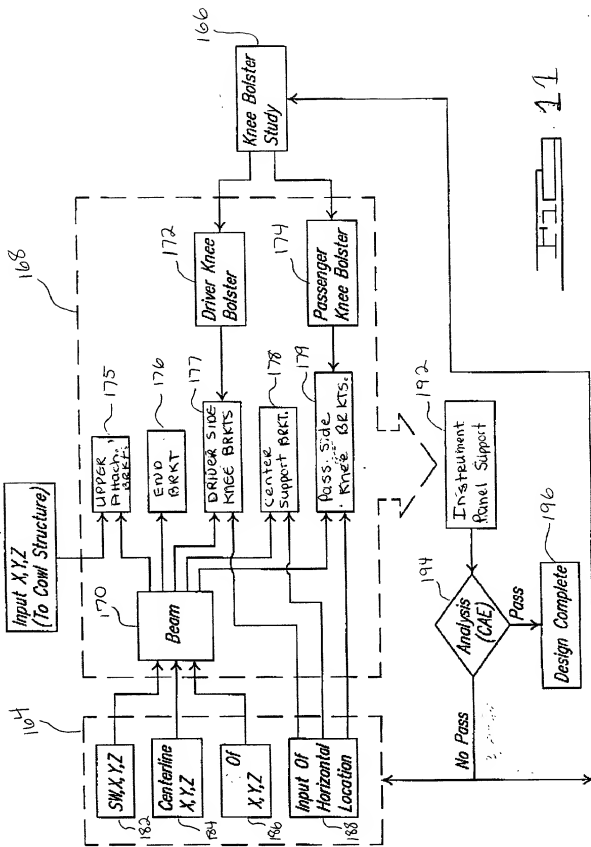

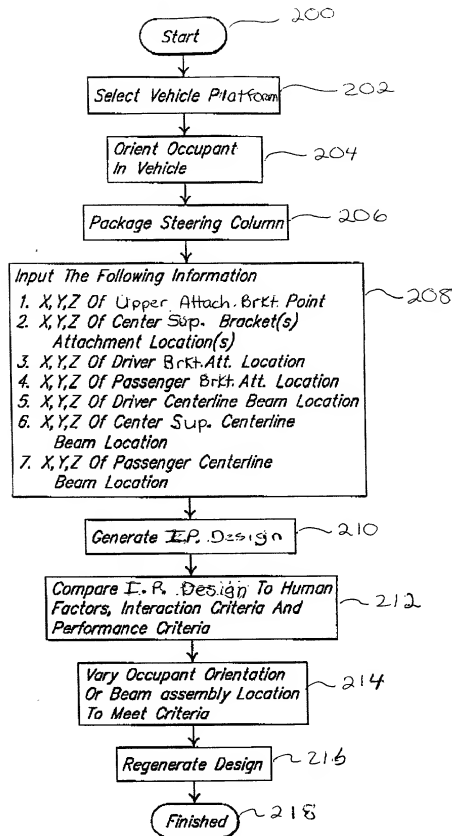

09385739-0020099

